



## LYNGSOE WORKSTATION™

### RFID READER AND ALL-IN-ONE STAFF SOFTWARE

#### SOLUTIONS WITH OPTIONS FOR STAFF

Choose from three staff workstation options. All handle RFID tagged material and make fast work of transmitting identification between item and the library management system. Issue, return, renew and program RFID tags seamlessly with either configuration.

#### V2 ANTENNA AND READER

This is a fixed, discrete and cost-efficient system. The reader is positioned beneath the staff desk, reducing clutter and the shielded antenna provides accurate reading area, minimizing false readings and other interference.

#### V1 TABLETOP – MOVABLE, FLEXIBLE

The simple table-top reader can handle multiple items simultaneously and can be transferred to other sites easily if needed. Either solution manages circulation or tagging and the user-friendly design enables fast and safe processing in either mode.

#### THE MIDRANGER

All the features of a shielded RFID staff workstation in a Red Dot award-winning sleek, modern and robust design.

#### BENEFITS

- Easy to use
- Stylish design / invisible
- Multiple staff functionalities
- Stack reading
- Accurate reading area



## SPECIFICATIONS

## LYNGSOE WORKSTATION™

### GENERAL

Functions	Check-out, Check-in, Multiple functions
Item identification	RFID
Security	RFID (AFI/EAS)
RFID standards	ISO15693 SLIX 18000-3-1
RFID data models	ISO28560, DDM, KATVE, TechLogic, TV2, 3M, TRC, ITG, ITG2

### COMPATIBILITY AND PROGRAMS

Operating system	Windows 10
Software	GoodStuff Combi (staff and conversion)
Connections	USB and TCH/IP
Library systems	Voyager, Sierra, DDE, Library, Aurora, Integra, Book-it, Bibliofil, Micromarc, Quria

### TECHNICAL INFORMATION

Installation	On top of or underneath the table; Shielded reader can be installed near metal.
Input voltage	100-240 V
Power Consumption	30 W
Dimensions	V1 Tabletop reader: 240 x 118 x 55 mm / 9.5 x 4.6 x 2.2" V1 Antenna: 275 x 275 x 15 mm / 10.8 x 10.8 x 0.6" V2 Shielded reader: 335 x 220 x 40 mm / 13.2 x 8.7 x 1.6" MidRanger: Approx. 140 x 105 x 29 mm / 5.5 x 4.1 x 1.1" (L x W x H) MidRanger antenna: Approx. 370 x 285 x 20 mm / 14.6 x 11.2 x 0.8" (L x W x H)
Unit weight	Table top reader: 2 kg / 4.4 lbs Shielded reader: 1.5 kg / 3.3 lbs Midranger, antenna: Approx. 4 kg / 8.8 lbs Midranger, reader: Approx. 0.6 kg / 1.3 lbs
Certificates	CE, FCC, UL




### V2 ANTENNA AND READER

Under table station



### V1 TABLETOP

Tabletop staff station

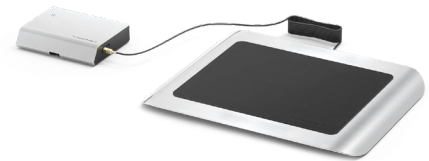

### THE MIDRANGER

MidRanger with antenna



[www.lyngsoesystems.com](http://www.lyngsoesystems.com)  
[library@lyngsoesystems.com](mailto:library@lyngsoesystems.com)

